





Replaces open tube	4 mm
Noise reduction	17 dB(A)
Air-/ cost savings	16 Nm³/h

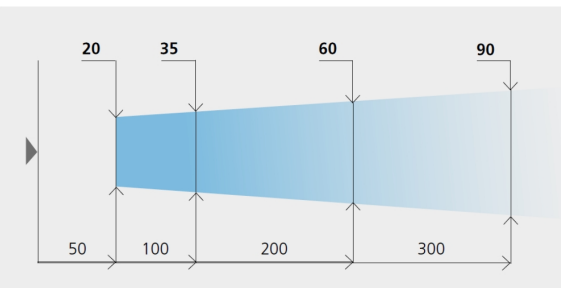

SILVENT X01-M200	L=315mm
SILVENT X01-M300	L=415mm
SILVENT X01-M400	L=515mm
SILVENT X01-M500	L=615mm

Silvent X01-M500

VA magnet holder with VA Flexblow with Multi-Laval nozzle X01 | 2.8N - L=500mm - IG 1/8

Silvent X01-M500: Magnetic holder with flow control, FlexBlow hose and nozzle for quick installation and easy adjustment to the correct blowing angle. The FlexBlow hose maintains the desired position even at high pressure. Available in 4 standard lengths. Otherwise the same performance as X01.

Technical data

Item number	763023
Weight	882 g
Air consumption	14 Nm³/h
Sound	78 dB(A)
Blowing Power	2,8 N
Max. Operating pressure	1,0 MPa
Max temperature	70 °C
Material	1.4404 Stainless Steel
Air pattern	Multi Laval
Connection	1/8 BSP