





**Product test possible!**

**Replaces open tube** Ø 4 mm

**Noise reduction** 65 %

**Air-/ cost savings** 37 %

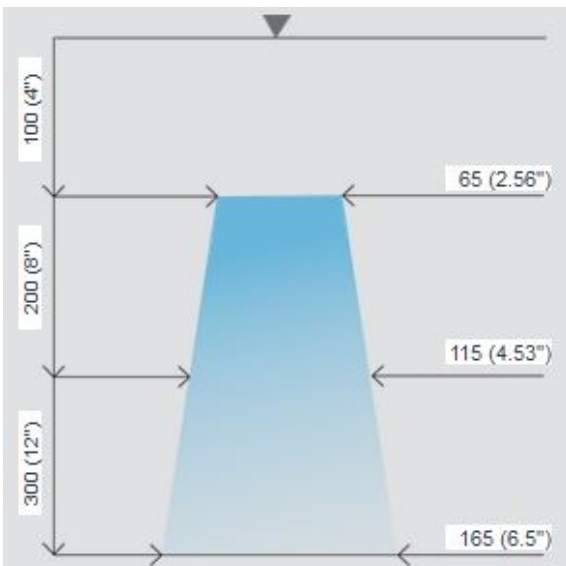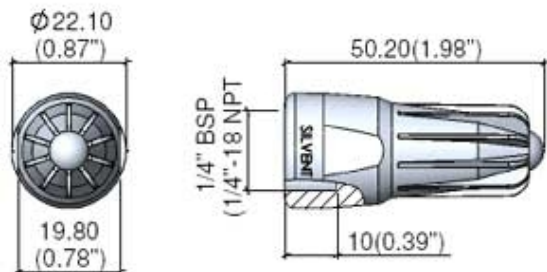

## Silvent 208

### Wide nozzle

SILVENT 208: used in most types of applications. Made of zinc with 1/4" female connection thread. These nozzles have been installed in thousands of different applications throughout the world - applications where the noise level has been cut in half and energy consumption drastically reduced. The protective fins prevent direct contact between skin and the exhaust ports. With this design, the nozzle fulfills the OSHA requirements of a dead-end static pressure of 210 kPa (30 psi) and EU Machine Directive noise limitations.

### Technical data

Item number	712107
Weight	0,04 kg
Air consumption	19 Nm <sup>3</sup> /h
Air connection	1/4 "
Sound	80 dB(A)
Blowing Power	3.5 N
Dimensions LxWxH	Ø 22 x 50 mm
Max. Operating pressure	1.0 MPa
Max temperature	70 °C
Material	Zinc
Air pattern	Wide