




**Product test possible!**

**Replaces open tube** Ø 4 mm

**Noise reduction** 67 %

**Air-/ cost savings** 37 %

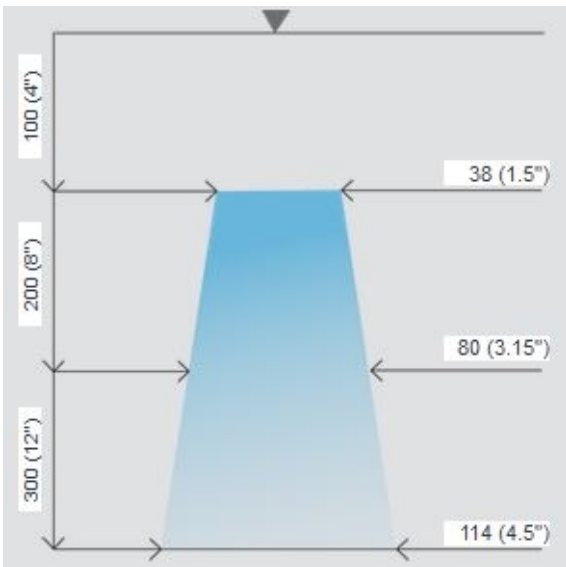

## Silvent 512

### Slotnozzle

SILVENT 512: slot nozzle that generates a directed air jet. Suitable for all-purpose blowing and blowing in confined spaces. Compact size makes this nozzle a popular choice for use in machines and tools where clearance is limited. Combines advantages of low noise level and low air consumption with high blowing force. Meets OSHA safety regulations stipulating that air pressure in direct contact with skin must not exceed 210 kPa (30 psi). Also meets EU Machine Directive noise restrictions. Patented.

### Technical data

Item number	715014
Weight	0,005 kg
Air consumption	19 Nm <sup>3</sup> /h
Air connection	1/8 "
Sound	79 dB(A)
Blowing Power	3.2 N
Dimensions LxWxH	Ø 12 x 30,3 mm
Max. Operating pressure	1.0 MPa
Max temperature	70 °C
Material	Zinc
Air pattern	Concentrated