


**Product test possible!**

**Replaces open tube** **16 mm**

**Noise reduction** **88 %**

**Air-/ cost savings** **51 %**

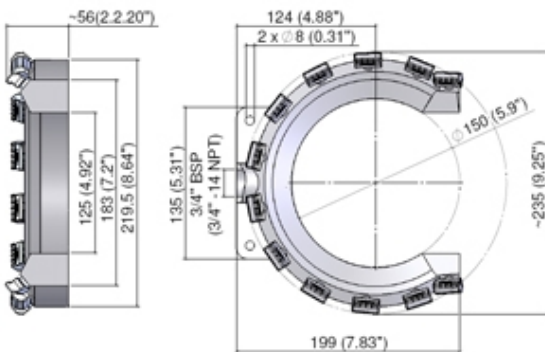

## Doughnut - open version - 25-105mm - with 12x Zinc angled Flat nozzle SV961 - female R3/4" BSP

SILVENT 464: a doughnut nozzle with just an outer ring of flat nozzles that offers the very lowest noise level and air consumption. Perfectly adequate for the removal of lightweight matter and lesser amounts of liquid. Provides plenty of blowing force for applications such as drying or cleaning of cable, pipe, hose or sections passing through the doughnut at moderate speeds. Efficient and uniform 360° coverage is guaranteed - even at the opening in the doughnut, where extra powerful nozzles are mounted at the optimal blowing angle. SILVENT 464 allows problem-free insertion and removal of material with diameters of 25 to 105 mm (1.0 - 4.1") through the opening in the doughnut. There are attachment lugs for easy and safe mounting. Fully complies with the noise limitations of the EU Machine Directive and OSHA safety standards. Patented."

### Technical data

Item number	744105
Air consumption	234 Nm <sup>3</sup> /h
Air connection	3/4 "
Sound	92 dB(A)
Blowing Power	32 N
Dimensions LxWxH	235 x 205 x 56 mm
Material	Zinc

Air pattern

Misc.