




**Product test possible!**

**Replaces open tube** **4 mm**

**Noise reduction** **69 %**

**Air-/ cost savings** **53 %**

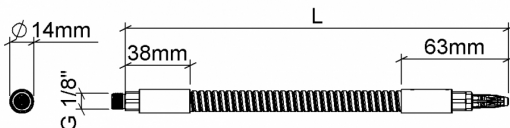

Silvent X01-200	L=225mm
Silvent X01-300	L=325mm
Silvent X01-400	L=425mm
Silvent X01-500	L=525mm

## Silvent X01-200

### VA-Flexblow L=200mm with Multi-Lavalnozzle X01

SILVENT X01-200 - X01-500: nozzle mounted on a bendable stainless steel FlexBlow hose that keeps the desired position, even when blowing at high pressure. Available in 4 different standard lengths. The FlexBlow hose has a 1/8" male connection thread. Otherwise, the same performance as X01.

### Technical data

Item number	753021
Air consumption	14 Nm <sup>3</sup> /h
Air connection	1/8 "
Sound	78 dB(A)
Blowing Power	2,8 N
Dimensions LxWxH	Ø 11x33 mm
Max. Operating pressure	1 MPa
Max temperature	400 °C
Material	Stainless Steel
Air pattern	Multi Laval