





Replaces open tube **6 mm**

Noise reduction **16 dB(A)**

Air-/ cost savings **33 Nm³/h**

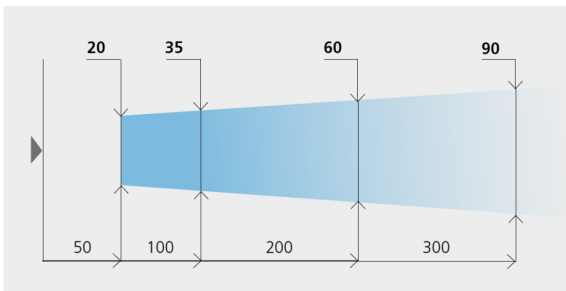

SILVENT X02-M200	L=315mm
SILVENT X02-M300	L=415mm
SILVENT X02-M400	L=515mm
SILVENT X02-M500	L=615mm

Silvent X02-M200

VA-Magnethalter mit VA-Flexblow L=200mm
mit Multi-Lavaldüse X02 | 6.5N - IG 1/4

Silvent X02-M200: Magnetic holder with flow control, FlexBlow hose and nozzle for quick installation and easy adjustment to the correct blowing angle. The FlexBlow hose maintains the desired position even at high pressure. Available in 4 standard lengths. Otherwise the same performance as X02.

Technical data

Item number	763030
Weight	853 g
Air consumption	34 Nm ³ /h
Sound	86 dB(A)
Blowing Power	6,5 N
Max. Operating pressure	1,0 MPa
Max temperature	70 °C
Material	1.4404 Stainless Steel
Air pattern	Multi Laval
Connection	1/4 BSP