





Replaces open tube **6 mm**

Noise reduction **24 dB(A)**

Air-/ cost savings **39 Nm³/h**

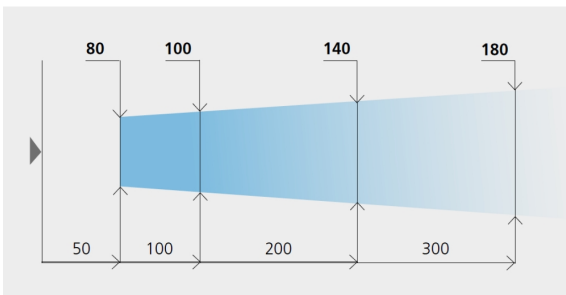

| | |
|----------------------|---------|
| SILVENT 9002W-S-M200 | L=343mm |
| SILVENT 9002W-S-M300 | L=443mm |
| SILVENT 9002W-S-M400 | L=543mm |
| SILVENT 9002W-S-M500 | L=643mm |

Silvent 9002W-S-M300

VA magnet holder with flat nozzle SV 9002W-S with VA Flexblow | 5,5N - L=300mm - IG 1/4

Silvent 9002W-S-M300: Magnetic holder with flow control, FlexBlow hose and nozzle for quick installation and easy adjustment to the correct blowing angle. The FlexBlow hose maintains the desired position even at high pressure. Available in 4 standard lengths. Otherwise the same performance as 9002W-S.

Technical data

| | |
|-------------------------|------------------------|
| Item number | 763041 |
| Weight | 967 g |
| Air consumption | 28 Nm ³ /h |
| Sound | 78 dB(A) |
| Blowing Power | 5,5 N |
| Max. Operating pressure | 1,0 MPa |
| Max temperature | 70 °C |
| Material | 1.4404 Stainless Steel |
| Air pattern | Flat |
| Connection | 1/4 BSP |