





Replaces open tube **7 mm**

Noise reduction **16 dB(A)**

Air-/ cost savings **39 Nm³/h**

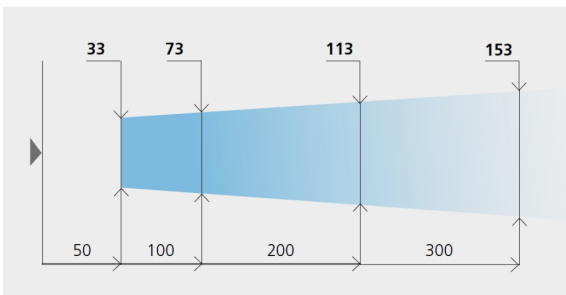

SILVENT X03-M200	L=315mm
SILVENT X03-M300	L=415mm
SILVENT X03-M400	L=515mm
SILVENT X03-M500	L=615mm

Silvent X03-M500

VA magnet holder with Multi-Laval nozzle
X03 with VA Flexblow | 10N - L=500mm -
IG 1/4

Silvent X03-M500: Magnetic holder with flow control, FlexBlow hose and nozzle for quick installation and easy adjustment to the correct blowing angle. The FlexBlow hose maintains the desired position even at high pressure. Available in 4 standard lengths. Otherwise the same performance as X03.

Technical data

Item number	763063
Weight	1000 g
Air consumption	53 Nm ³ /h
Sound	89 dB(A)
Blowing Power	10 N
Max. Operating pressure	1,0 MPa
Max temperature	70 °C
Material	1.4404 Stainless Steel
Air pattern	Multi Laval
Connection	1/4 BSP